ATELIER CRAIG
Rapport de contrôle de marche
FRANÇAIS

Molnija 3602 - montre de poche soviétique

Fiche produit 136 | Rapport mis à jour le 25 octobre 2026 - version 2 | Diamètre déclaré : 50 mm

Identification et intervention
Montre mécanique à remontage manuel, calibre 3602 à 18 rubis, petite seconde à 6 heures, cadran à repères rouges 13-24 et décor de locomotive au dos. Révision complète déclarée par Atelier Craig dans les notes fournies. Le détail des opérations, les pièces remplacées et la date de fin de révision ne sont pas précisés dans ces éléments.

Mesures photographiées

Cinq relevés photographiés : A-D proviennent de la vidéo « 1000043645.mp4 » ; E provient de la photographie « 1000042767.jpg », fournie en remplacement de la vue avec reflets. E : cadran bas, position confirmée par Atelier Craig. Les positions A-D ne sont pas documentées.

Photo	Marche / Rate	Amplitude*	Repère / Beat error
A	+16 s/j / s/day	296°	0.5 ms
B	-4 s/j / s/day	251°	0.5 ms
C	-30 s/j / s/day	247°	0.4 ms
D	-2 s/j / s/day	263°	0.6 ms
E	+22 s/j / s/day	320°	0.3 ms

Appareil : Weishi No. 1900. **Fréquence affichée sur A-D :** 18 000 alternances/heure. **Angle de levée saisi :** 52°. Il s’agit du réglage visible de l’appareil, pas d’une valeur constructeur validée pour cette montre. *Les amplitudes sont retranscrites telles qu’affichées et dépendent de cet angle.

Lecture et limites

Les cinq marches photographiées s’étendent de -30 à +22 s/j, soit un écart de 52 s/j entre ces instantanés. Le défaut de repère affiché varie de 0,3 à 0,6 ms. Ces photographies ne permettent pas de calculer une marche quotidienne représentative ni de conclure à la stabilité sur la durée.

Le niveau de remontage, la durée de stabilisation, la température, la durée de chaque mesure, les positions A-D et la réserve de marche réelle ne sont pas documentés. La nouvelle photographie E confirme une lecture cadran bas : +22 s/j, 320° et 0,3 ms.

Portée du document : compte rendu documentaire des éléments fournis, sans nouveau test physique. Il ne constitue ni une certification chronométrique ni une garantie chiffrée de précision. Aucune épreuve d’étanchéité n’est attestée. Conserver la montre à l’abri de l’eau et des chocs.

ATELIER CRAIG
Timekeeping inspection report
ENGLISH

Molnija 3602 - Soviet pocket watch

Product record 136 | Report updated 25 October 2026 - version 2 | Reported diameter: 50 mm

Identification and work
Manual-wind mechanical pocket watch, calibre 3602 with 18 jewels, small seconds at six, red 13-24 dial markings and locomotive caseback decoration. A full service is reported by Atelier Craig in the supplied notes. The individual operations, replacement parts and service completion date are not specified in this evidence.

Photographed readings

Five photographed readings: A-D come from video “1000043645.mp4”; E comes from “1000042767.jpg”, supplied to replace the glare-obscured view. E is dial down, as confirmed by Atelier Craig. Positions A-D are undocumented.

Photo	Marche / Rate	Amplitude*	Repère / Beat error
A	+16 s/j / s/day	296°	0.5 ms
B	-4 s/j / s/day	251°	0.5 ms
C	-30 s/j / s/day	247°	0.4 ms
D	-2 s/j / s/day	263°	0.6 ms
E	+22 s/j / s/day	320°	0.3 ms

Instrument: Weishi No. 1900. **Displayed frequency on A-D:** 18,000 beats/hour. **Entered lift angle:** 52°. This is the visible instrument setting, not a verified manufacturer specification for this watch. *Amplitudes are copied as displayed and depend on that setting.

Interpretation and limitations

The five photographed instantaneous rates range from -30 to +22 seconds/day, a spread of 52 seconds/day between these snapshots. Displayed beat error ranges from 0.3 to 0.6 ms. The photographs do not establish a representative daily rate or stability over time.

Winding level, settling time, temperature, measurement duration, positions A-D and actual power reserve are undocumented. The replacement photograph E confirms a dial-down reading of +22 seconds/day, 320° and 0.3 ms.

Scope: a documentary summary of supplied evidence, without a new physical test. This is neither chronometer certification nor a numerical accuracy guarantee. No water-resistance test is evidenced. Keep the watch away from water and shocks.

A et B / A and B

A : +16 s/j - 296° - 0,5 ms




B : -4 s/j - 251° - 0,5 ms




C, D et E / C, D and E

C : -30 s/j - 247° - 0,4 ms

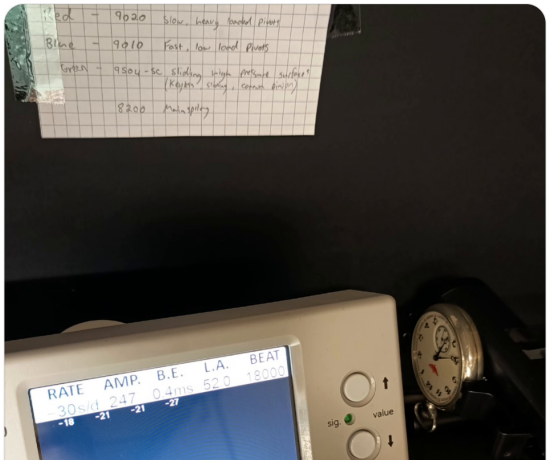

D : -2 s/j - 263° - 0,6 ms

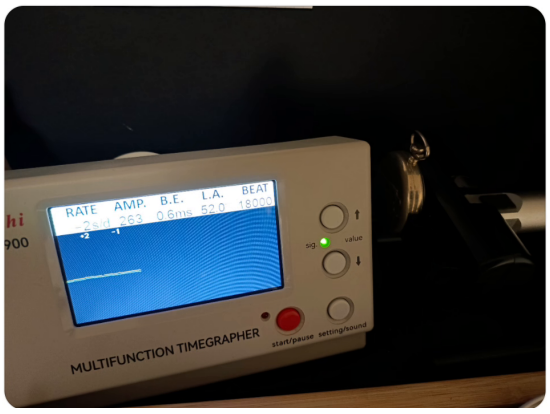

E : cadran bas / dial down : +22 s/j - 320° - 0,3 ms

